




CODE = R-11.4ci | U-0.090

BASE = R-12ci | U-0.071*

OPTIMIZED = R-16.8ci | U-0.053*

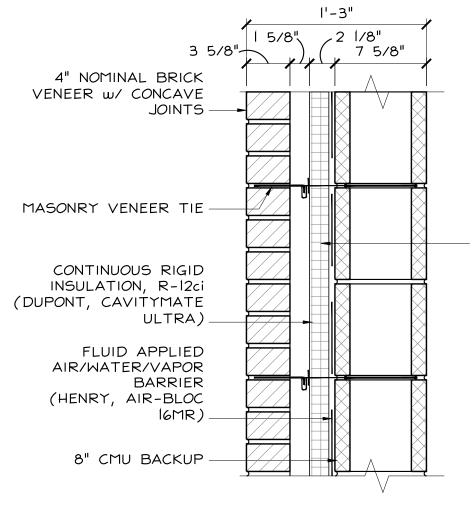

OPTIMIZED: (NOT SHOWN)
3" CONTINUOUS RIGID
INSULATION, R-16.8ci
(DUPONT, CAVITYMATE
ULTRA)

NFPA 285 NOTES:

- MAXIMUM 3"
 STYROFOAM
 INSULATION THICKNESS
- USE HEADER
 CONDITIONS AS SHOWN
 IN MANUFACTURER'S
 EXTENSION REPORT

MASONRY VENEER w/ CMU

SCALE: 1 1/2" = 1'-0"



_ ហ

MASONRY VENEER w/ RIGID INSULATION & CMU BACK-UP (IECC 2021 - CLIMATE ZONE 5)

Sketch #: **SK-01**Sheet: 1 of 1