





CODE = R-11.4ci | U-0.090

BASE = R-14ci | U-0.084*

OPTIMIZED = R-26ci | U-0.050*

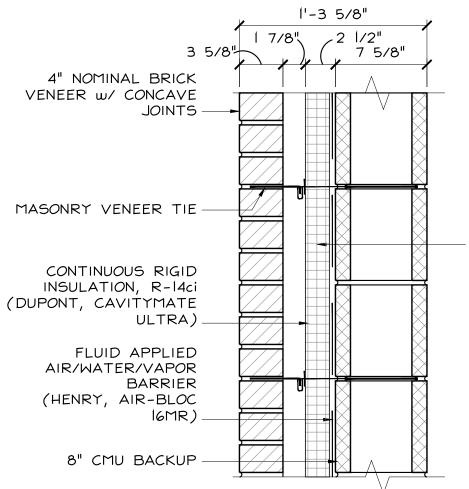

OPTIMIZED: (NOT SHOWN)
4" CONTINUOUS RIGID
INSULATION, R-26ci
(DUPONT, THERMAX
SHEATHING)

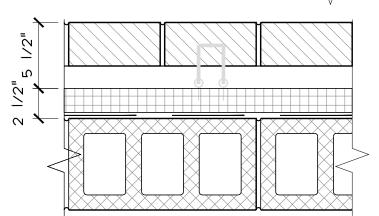

NFPA 285 NOTES:

- MAXIMUM 3"
 STYROFOAM
 INSULATION THICKNESS
- USE HEADER
 CONDITIONS AS SHOWN
 IN MANUFACTURER'S
 EXTENSION REPORT

MASONRY VENEER w / CMU

SCALE: 1 1/2" = 1'-0"



MASONRY VENEER w/ RIGID INSULATION & CMU BACK-UP (IECC 2021 + MA STRETCH ENERGY CODE) Sketch #: SK-01

Sheet: 1 of 1